TILE-TEX *floors*

for ***comfort, quiet & everlasting service***

FOR LIFETIME FLOORS

Specify Tile-Tex Resilient Floor Tile

AFTER all, it is the floors you put into a building that, in the final analysis, governs the measure of ultimate satisfaction enjoyed by the owner or occupant. And while attractiveness that will not grow wearisome is to be desired, nothing is more indispensible to perfect service than durability and minimized upkeep.

With a TILE-TEX tile floor there is upkeep. TILE-TEX Resilient Floor does not wear out. Traffic has only ing effect upon it. Water does not Neither does dampness. It is the sub-floor with Tile-Tex Asphalt which, like TILE-TEX, is w alkali proof. You can spe for use over concrete flo grade without the slightes ing loose or disintegrat dampness.

TILE-TEX is comp and asbestos. By natu time-resisting chara materials. In the these materials ar the same vehic them—tremen asphalt and as and there is TEX before

As to b did varie tion ma with th TILE Mah the si

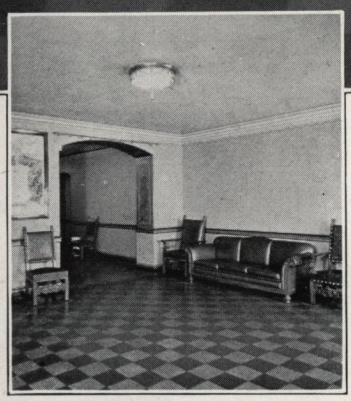

When the question of floors for the new Masonic Temple in Cincinnati, Ohio, came up, TILE-TEX was specified by the Architects, Harry Hake and Chas. Kuck. The F. A. Kamp Flooring Co. made the installation.

At the left is another room in the Masonic Temple, floored with TILE-TEX Resilient Floor Tile.

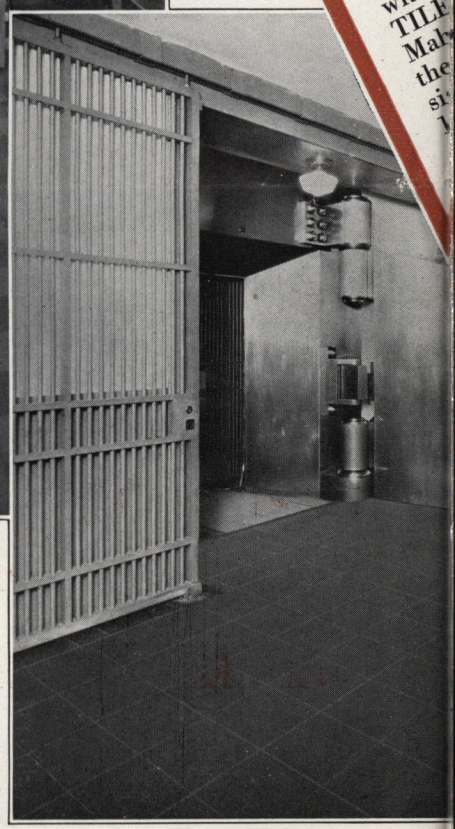

3,500 pound truck loads of coin are trafficked back and forth across this TILE-TEX floor several times a day in the Federal Reserve Bank, St. Louis, Mo. Mauren, Russell & Crowell, Architects.

These desks are bolted thru the TILE-TEX Floor in the classrooms of the Roosevelt School, Maywood, Ill. Max Dunning, Chicago, was the Architect.

Here's another view of the Cincinnati Masonic Temple, showing how Architects Hake and Kuck used TILE-TEX for the auditorium floor.

e
ra-

is no
r Tile
polish-
harm it.
mented to
alt Cement,
er, acid and
y TILE-TEX
s at or below
ear of tile com-
n resulting from

ed chiefly of asphalt
it has the invincible,
ristics of these famous
making of TILE-TEX
amalgamated into tile by
s nature used to produce
us heat and pressure. Both
estos are inert and inorganic
chemical change in TILE-
r after amalgamation.

uty, TILE-TEX affords a splen-
of colors. Almost any combina-
be arranged and any taste satisfied
seven beautiful, clear-thru, fadeless
EX shades—Black, Red, Tan, Green,
gany, Blue and Gray. And there are
six practical sizes from which to de-
any pattern desired — 6x6, 6x12, 9x9,
12, 12x24 and 18x24.

Architects everywhere endorse and speci-
fy TILE-TEX Resilient Floor Tile because
of its distinctive adaptability for use in areas
subject to constant traffic and hard wear,
where durability, appearance, quietness and
resiliency are required. TILE-TEX is laid in
one operation, and is at once ready for use.

For Lifetime Floors—for beauty and free-
dom from upkeep, specify TILE-TEX Re-
silient Floor Tile. It's not something new
and untried. Millions of feet of it are giving
remarkable floor service throughout the
country. Promptly supplied by our resilient
floor specialists everywhere.

Let us show you how much less it costs than other resilient floor tile. Mail the enclosed post card TODAY.

THE TILE-TEX COMPANY
Resilient Floor Tile — Last a Lifetime
CHICAGO HEIGHTS, ILLINOIS

See Sweet's Catalog Page B-1915

A FEW SPECIMENS OF TILE-TEX DESIGNS

Here are shown a few of the innumerable attractive designs that may be created with Tile-Tex Resilient Floor Tile. Our Creative Department will be glad to co-operate with Architects in working out distinctive floors in harmony with the environment and surroundings in which they are to be laid.

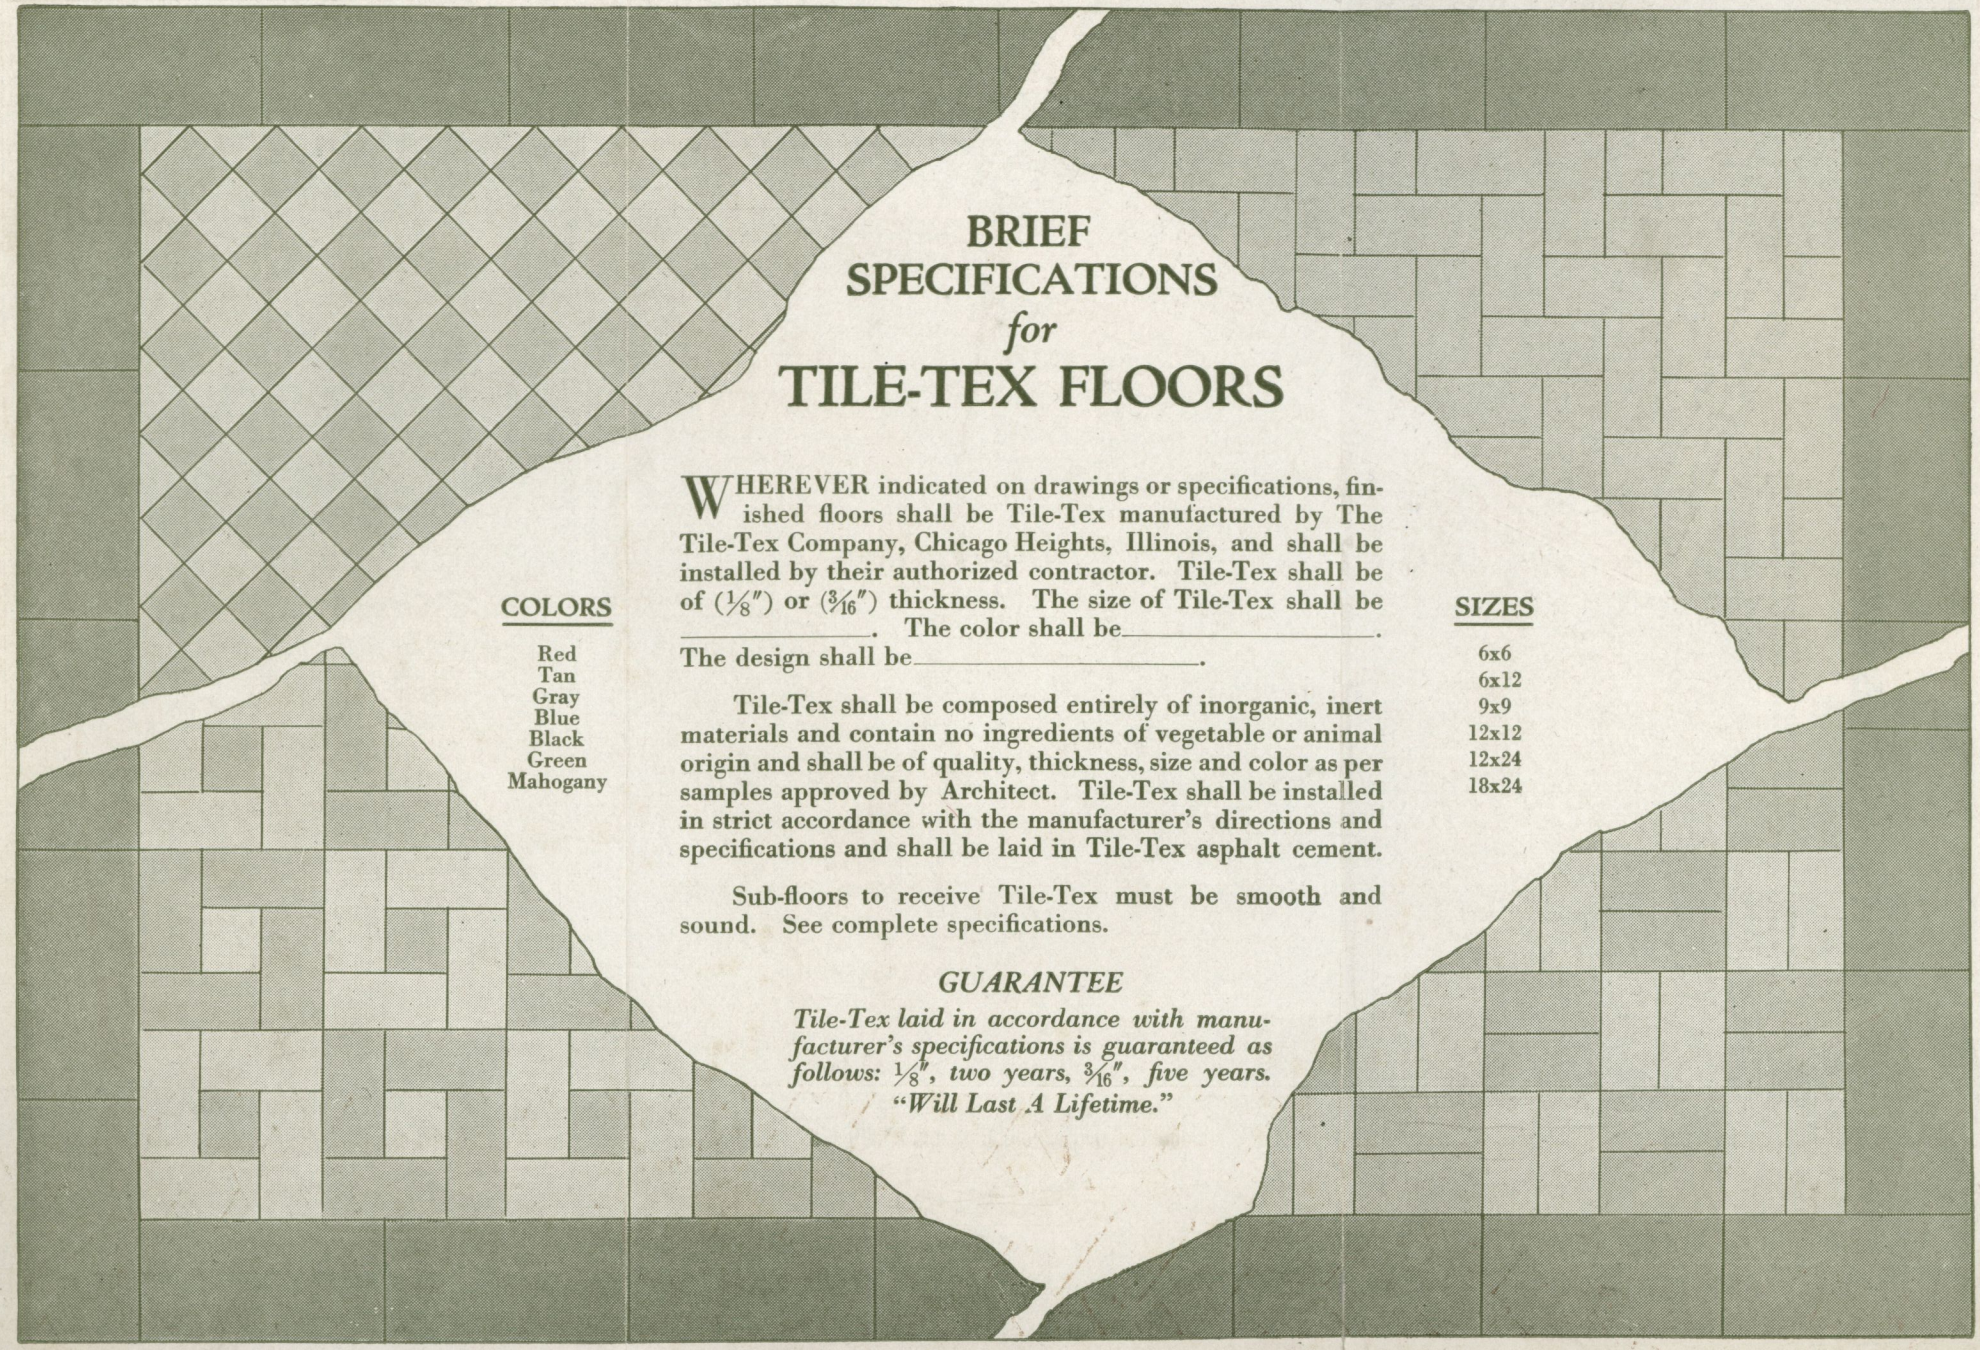

BRIEF SPECIFICATIONS *for* TILE-TEX FLOORS

WHEREVER indicated on drawings or specifications, finished floors shall be Tile-Tex manufactured by The Tile-Tex Company, Chicago Heights, Illinois, and shall be installed by their authorized contractor. Tile-Tex shall be of (1/8″) or (3/16″) thickness. The size of Tile-Tex shall be _____. The color shall be _____. The design shall be _____.

Tile-Tex shall be composed entirely of inorganic, inert materials and contain no ingredients of vegetable or animal origin and shall be of quality, thickness, size and color as per samples approved by Architect. Tile-Tex shall be installed in strict accordance with the manufacturer's directions and specifications and shall be laid in Tile-Tex asphalt cement.

Sub-floors to receive Tile-Tex must be smooth and sound. See complete specifications.

COLORS

Red
Tan
Gray
Blue
Black
Green
Mahogany

SIZES

6x6
6x12
9x9
12x12
12x24
18x24

GUARANTEE

Tile-Tex laid in accordance with manufacturer's specifications is guaranteed as follows: 1/8″, two years, 3/16″, five years.
"Will Last A Lifetime."

Form B-501

Printed in U. S. A.

Digitized by:

ASSOCIATION FOR PRESERVATION TECHNOLOGY
www.apti.org

For the

BUILDING TECHNOLOGY HERITAGE LIBRARY

https://archive.org/details/buildingtechnologyheritagelibrary

From the collection of:

SOUTHEASTERN ARCHITECTURAL ARCHIVE
SPECIAL COLLECTIONS
HOWARD-TILTON MEMORIAL LIBRARY

http://seaa.tulane.edu

A. I. A. File No. 23-D

A FEW SPECIMENS OF TILE-TEX DESIGNS

Here are shown a few of the innumerable attractive designs that may be created with Tile-Tex Resilient Floor Tile. Our Creative Department will be glad to co-operate with Architects in working out distinctive floors in harmony with the environment and surroundings in which they are to be laid.

SIZES

6x6
6x12
9x9
12x12
12x24
18x24